








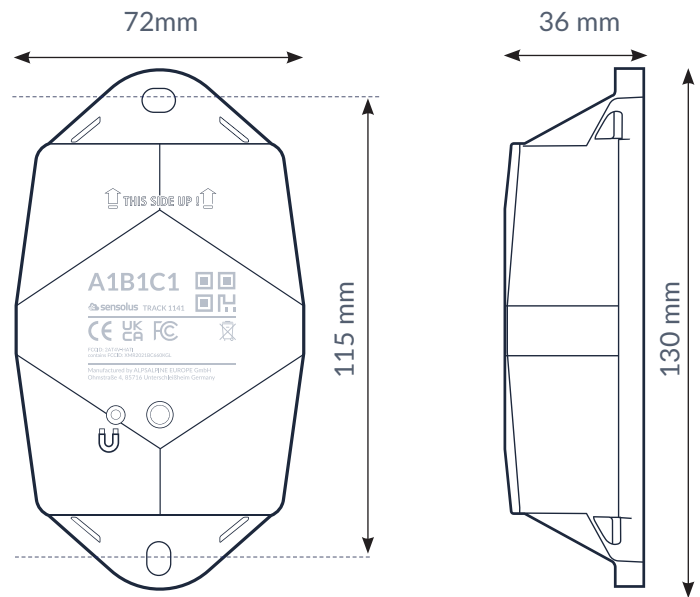


The rugged low-power tracker with long battery life with NB-IoT connectivity and guaranteed data recovery. The tracker provides general localization, zone and high precision. The tracker firmware can be upgraded over the air.

-  GNSS
-  Bluetooth geobeacon for zone precision
-  NB-IoT
-  Europe and North America
-  Data recovery
-  IP69K & IP68
-  IK 09
-  Flame retardant
-  Up to 10 years of battery life ([read the details](#))



Connectivity

NB-IoT

- Energy efficient transceiver
- Internal omnidirectional antenna
- Bi-directional communication
- NB-IoT bands: Europe/North America
- Data recovery
- OTA firmware upgrade (NB-IoT)

Bluetooth Low Energy (BLE)

Bluetooth Low Energy 5.0

Connectivity plan

- TRACK 1141 comes with the [Standard connectivity plan](#).

Geolocalization

GNSS

Multi GNSS constellation chipset (GPS+GALILEO)

BLE

- Sensolus proximity beacon detection
- Detectable by zone and high precision anchors

Sensing

Internal

- Activity monitoring
- Orientation monitoring
- Virtual tamper detection

Activation and mounting

- [Activation manual](#)
- Instructions for mounting the device are available in the [Sensolus documentation center](#).

Mechanics & design

Antennas

All antennas are internal

Size

130x72x36 mm (L W H)

Weight

212 gram

Color

White

Casing

- PBT/PC 29 TM-Z2 FR UV LS
- Flame retardant
- UV-stabilized

Battery

Standard 3 cell

- User replaceable battery pack (Li-SoCl₂) 10500 mAh
- 2.94 gram lithium

Certifications

Regulatory

- CE
- FCC

User interaction

Device activation

Magnetic activation

Synchronize remote settings

- Instant: Magnet activation
- Periodic: No user interaction needed

Management services

Diagnostics

- Battery lifetime prediction
- Detailed energy consumption
- Geolocation diagnostics
- Installation
- Communication quality

Water & dust resistance

IP68 & IP69K

Impact resistance

IK09

Drop shock and vibration

EN 60068

Operating temperature

-20°C to 60°C

The specifics regarding operational temperature are contingent upon the application, installation circumstances, and environmental factors such as sunlight exposure. For further information, please reach out to Sensolus. Battery life can be affected when devices function for extended periods at the extremes of this range.

Bluetooth 5.0

Declaration ID D068598

Electrical safety

EN 62368-1

LED feedback

Green & red LED feedback on the device

Management

- OTA firmware updates over NB-IoT and BLE
- Remote configuration
- Tracker usage profiles

Application services

- Localization
- Journeys
- Activity
- Utilization

Firmware configuration

Communication service

- Data recovery strategy
- Communication conditions

General configuration

- Rule engine configuration
- Diagnostic levels
- Boot methods
- Accurate time synchronization

Orientation service

Orientation detection parameters

Activity service

Activity detection parameters

Security

- Device unique encryption keys
- End to end payload encryption Chacha 20
- AES encrypted firmware
- Firmware upgrade allows only signed firmware images

Location service

- Motion based, periodic or scheduled
- Configurable update rate and journey detection
- Priority sequence (GNSS, Bluetooth geobeacon)
- GNSS fix parameters
- Indoor detection algo
- BLE scan strategy

Tamper service

Virtual tamper algo configuration