



Activation of the TAG 2007

The TAG 2007 is not activated when you receive it. The device comes with a mylar film to prevent battery drainage during storage.

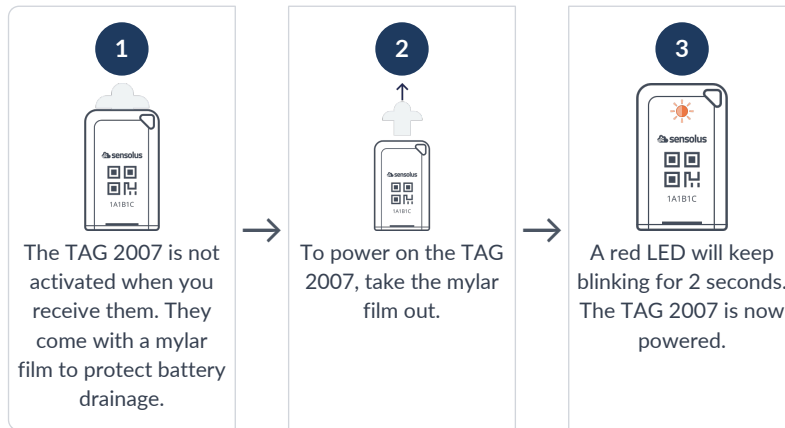

Mounting the TAG 2007

The TAG 2007 can be attached using double-sided tape, industrial-grade glue, or tie wraps. See [general mounting advice document](#) how to mount the tag.

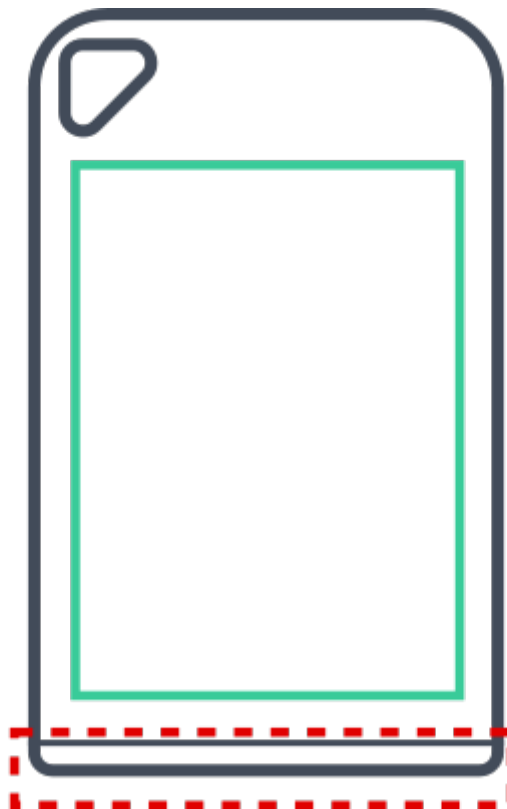


Do not cover the red area with double-sided tape or glue.

The green area is suited for double-sided tape or glue. The battery slot is not covered, so replacement is still possible.

Replacing batteries

When the battery needs to be replaced, follow these steps:

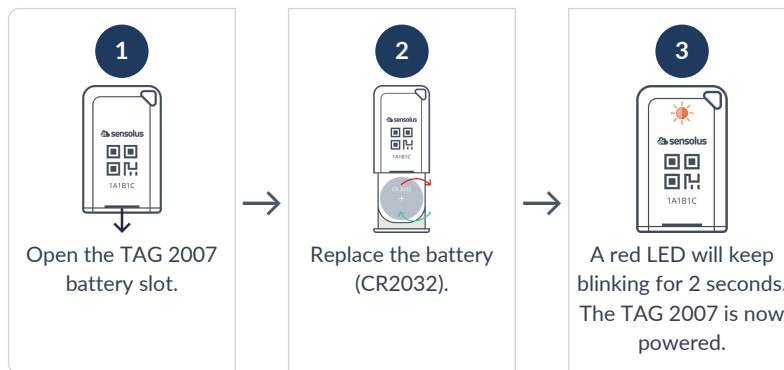

Safety advice – device subjected to strong mechanical impact

Risk of delayed battery failure and chemical hazard

If a device has been hit, crushed, or struck by a heavy object (for example a forklift, container, pallet, or falling load), the internal components and battery may be damaged even if no external damage is visible. Such damage can result in delayed overheating, leakage, or failure.

If a device has been subjected to a strong mechanical impact, the following mandatory safety actions must be taken:

#	Action	Details
1	Do not touch the device	Do not move, lift, open, shake, or inspect the device immediately after the impact. Internal damage may cause delayed reactions.
2	Keep a minimum safety distance	Maintain a clear distance of at least 5 meters from the device. Keep all personnel away during this period.
3	Wait at least 10 minutes	The device must remain untouched and undisturbed for a minimum of 10 minutes following the impact. This waiting time allows potential delayed thermal or chemical reactions to become evident.
4	Observe from a safe distance	Watch for warning signs: smoke, vapor, or unusual odor; heat generation; fluid leakage; hissing, cracking, or popping noises.
5	After the waiting period	If any abnormal condition is observed, isolate the area immediately and notify responsible safety or supervisory personnel. The device must be quarantined and handled according to battery safety and disposal procedures. The device must not be used.

A device may appear undamaged and still be unsafe. Normal operation after impact does NOT mean the device is safe. Failure to follow this safety advice may result in serious injury, fire, or chemical exposure.