



Activation of the TAG 2007

The TAG 2007 is not activated when you receive it. The device comes with a mylar film to prevent battery drainage during storage.

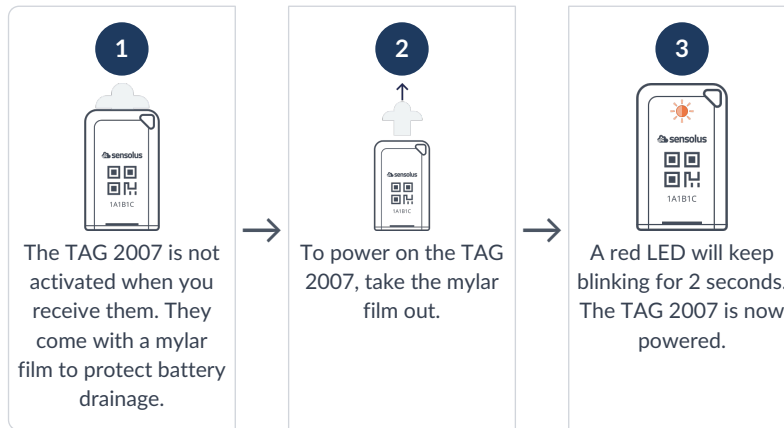

Mounting the TAG 2007

The TAG 2007 can be attached using double-sided tape, industrial-grade glue, or tie wraps. See [general mounting advice document](#) how to mount the tag.

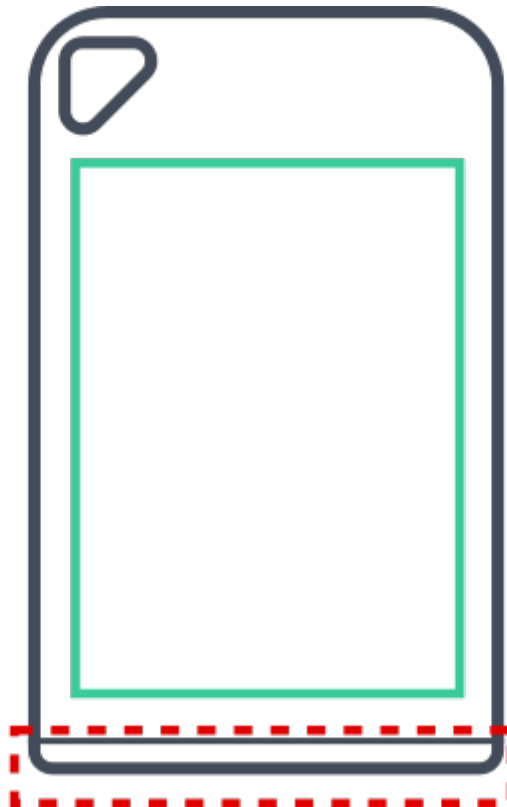

Do not cover the red area with double-sided tape or glue.

The green area is suited for double-sided tape or glue. The battery slot is not covered, so replacement is still possible.

Replacing batteries

When the battery needs to be replaced, follow these steps:

