


In order not to break the IP67 approval, we recommend not to replace the batteries.

The TRACK 1100 ships with a standard battery pack BAT 8204.
Please order these battery packs and replace with these battery packs.

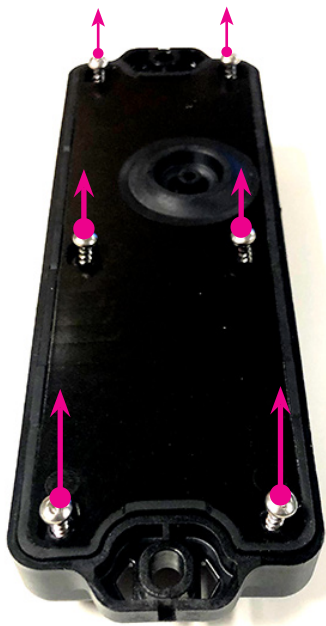

Step 1


Turn the tracker face down and unscrew the 6 screws.

Tip: If using a power drill, use power setting 7, on low. (Note: not all power drills have the same settings!)




Step 2

Remove the back plate and the 6 screws. You will need a screwdriver to open the tracker.

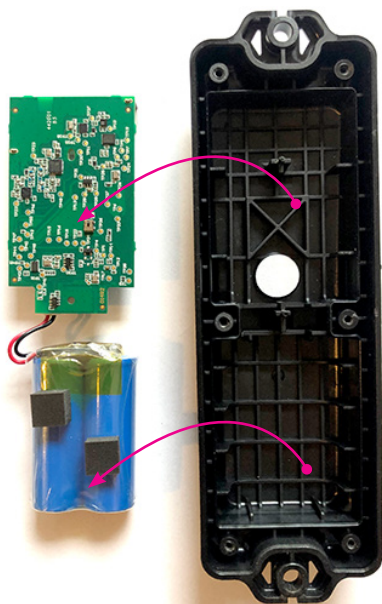

Step 3

Remove the circuit board and the battery pack.

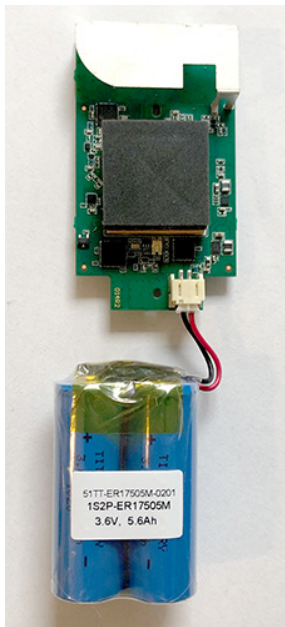


Step 4

Turn around the circuit board and battery pack



Step 5

Remove the battery pack - pull them out of the connector.

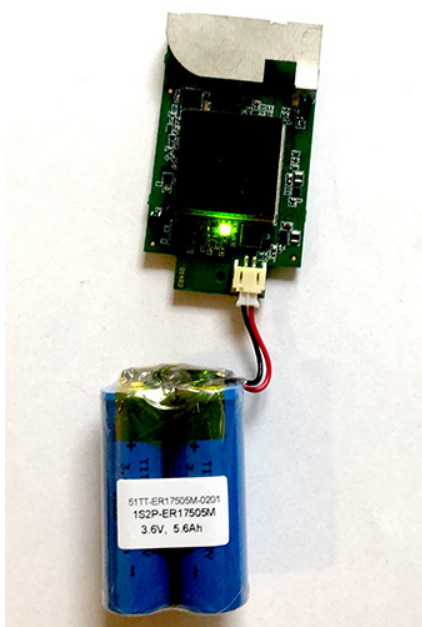


Step 6

Add a new battery pack, be carefull with the connector. A green LED will blink when the battery pack is connected.



Step 7


Reinsert the circuit board and battery pack. Make sure the LED is facing downward and the foam on the battery is facing upwards.

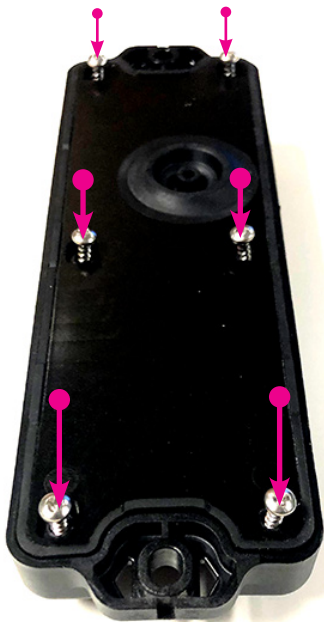

Step 8

Close the case again by tightening the 6 screws in the corresponding holes. Be careful not to break the casing when using a power drill.

Indicate battery replaced in platform

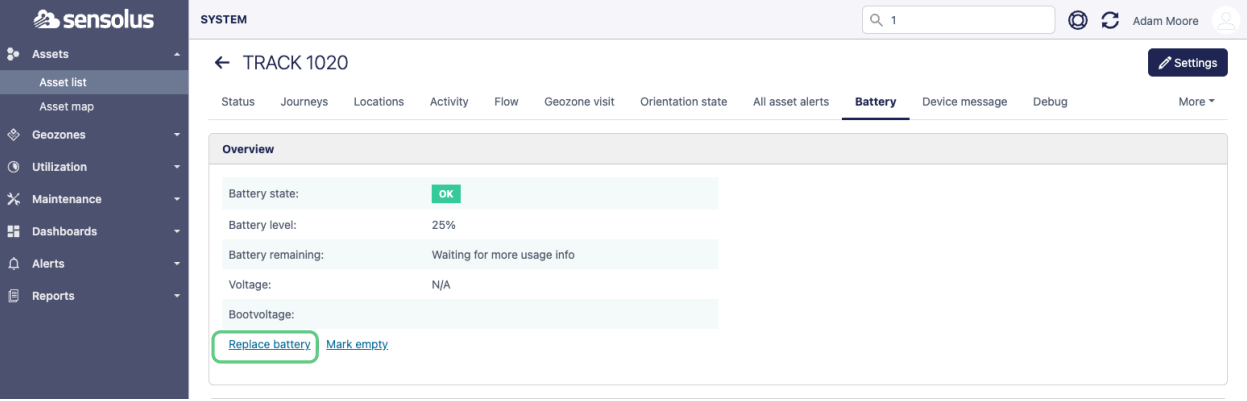

When you replaced the battery in the tracker you have to indicate that in the platform.

- Go to the tracker details page in the general section. You can search for this tracker or find it in the asset list or asset map.
- Click on the replace battery link to indicate you have replaced the battery of that tracker.
- Confirm the update.

